

# Fish Refrigeration

FISH LINE

Fish equipment


Refrigerated display  
Βιτρίνες Ψαριών






1



2

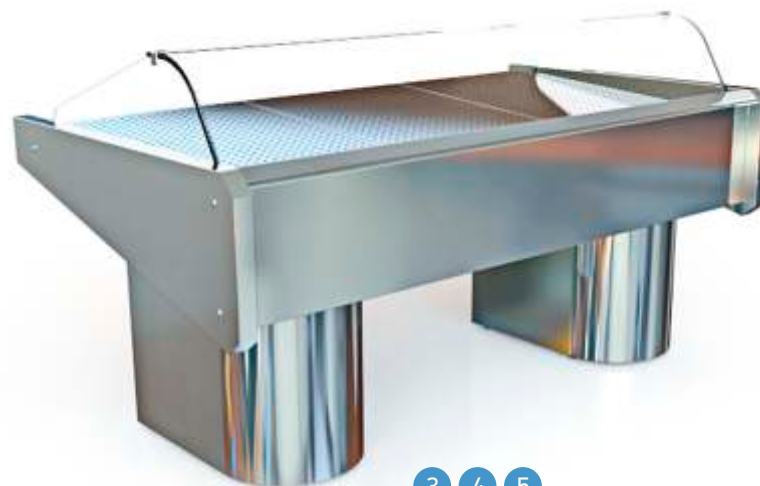

3 4 5



## Fish Refrigeration Specifications

### SPECIFICATIONS / ΧΑΡΑΚΤΗΡΙΣΤΙΚΑ

- On each door 3 laminated grid
- Automatic defrost
- Automatic evaporation of defrosting water with PTC electric resistance
- 70 mm ecological polyurethane insulation
- Choice between stainless steel legs or swivel wheels
- Magnetic gaskets
- Also available preset for remote condensing unit with valve

- Σε κάθε πόρτα 3 πλαστικοποιημένες σχάρες
- Αυτόματη απόψυξη
- Αυτόματη εξάτμιση των νερών την απόψυξης με PTC ηλεκτρική αντίσταση
- Μόνωση 70 χιλ. οικολογικής πολυουρεθάνης
- Επιλογή ανάμεσα σε ανοξείδωτα πόδια ή περιστρεφόμενες ρόδες
- Μαγνητικά κουμπωτά γάστια
- Διατίθεται χωρίς μηχανή με βαλβίδα

	Models R290	Models R449a	Dimensions (l) x (w) x (h) cm	Power (W)/(hp)	Temp. (°C)	
①	VP-099-KR	VP-099-K	94 x 90 x 120	435 / (1/4)	0 / +4	
②	VP-149-KR	VP-149-K	141 x 90 x 120	435 / (1/4)	0 / +4	
	Models R290	Models R449a	Dimensions (l) x (w) x (h) cm	Power (W)/(hp)	Temp. (°C)	
③	VP-201-KR	VP-201-K	200 x 110 x 120	590 / (1/2)	0 / +4	
④	VP-251-KR	VP-251-K	250 x 110 x 120	590 / (3/4)	0 / +4	
⑤	VP-301-KR	VP-301-K	278 x 110 x 120	772 / (3/4)	0 / +4	